

VEZETÉK NÉLKÜLI MOZGÁSÉRZÉKELŐ SZENZOR

NGBS-WZB-PMS-100

v1.0.0

Termékjellemzők:

Felületeken elhelyezhető, elemes (CR2450) mozgásérzékelő szenzor

Protokoll

ZigBee 3.0



Paraméter	Érték			Mértékegység
	Min	Jellemző	Max	
Érzékelési távolság			7	m
Érzékelés szöge			170	°
Üzemi feszültség		3		V
ZigBee link quality	100	180	255	LQI
Hatótáv	0		70	m

Környezeti jellemzők

IP védettség	IP20
Működési Hőmérséklet	-10°C - +50°C

Logisztikai adatok

Tömeg	96 g
Méret (MxHxSZ)	74x59x58 mm



CE tanúsítvány száma:


LCS2000715109AE

Töltse le az NGBS smart home mobilalkalmazást!




Rajzok


Attach the main body to the base using the adhesive protective film.

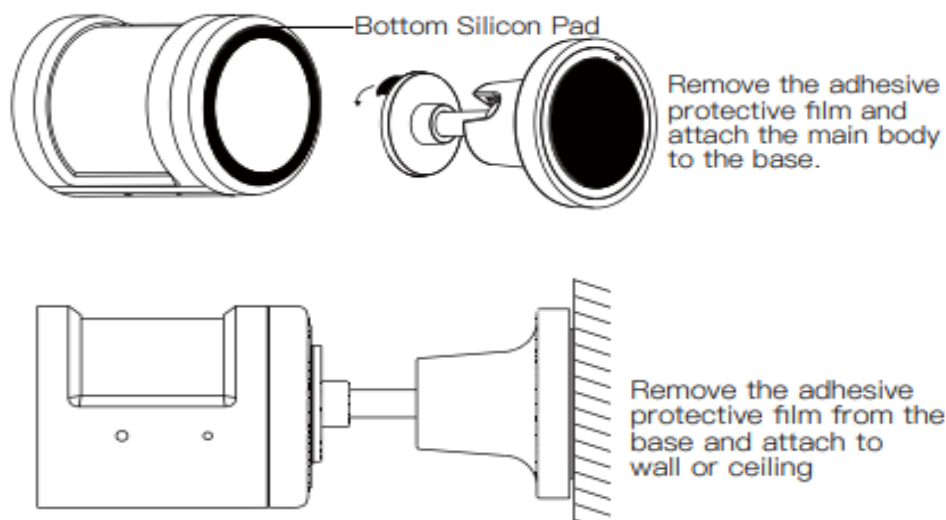


The bonding surface must be clean, dry and smooth without rust, stain or dust.



For a better bonding effect, apply force to the adhesive and bonding surface to secure the bond.



The VHB double-sided tape creates a strong bond quickly, which can reach full strength after 72 Hours. During this period, do not perform structural operations.



The tape requires a minimum application temperature of 10°C. A low temperature will decrease the adhesiveness of the tape and slow down drying.